




ONX-15 SS

FL # 42097.3

ONX-150 SS

Florida Product Approval: FL # 42097.3

Approved for installation inside HVHZ and Non-HVHZ

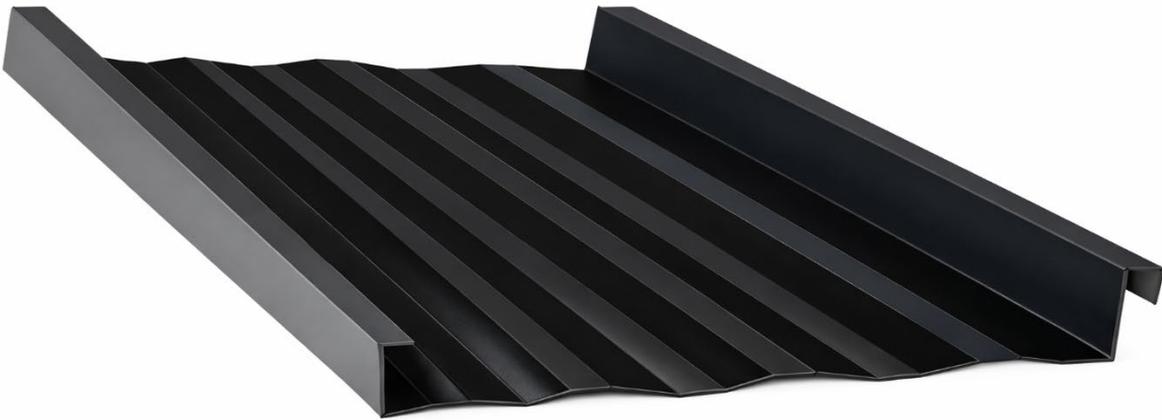

Material: 24ga (min) steel. Corrosion resistant per FBC 1507.4.3 where required.

Panel Description: Mechanical lock 16" (max) wide coverage.

Deck/Substrate: 5/8" (19/32" min) CDX Plywood sheathing

Slope : 2:12" (HVHZ), 1/2:12" (Non-HVHZ)

Sealant: Geocell 4500 Sealant required on top of male for slopes < 2:12"

Details: All panel system perimeters, Penetrations and Transitions to be flashed and sealed per Manufacturer's standard installation details and RAS 133.

2801 NW 55th Ct

Fort Lauderdale


Florida, 33309



954-323-8494



office@onyx-metals.com

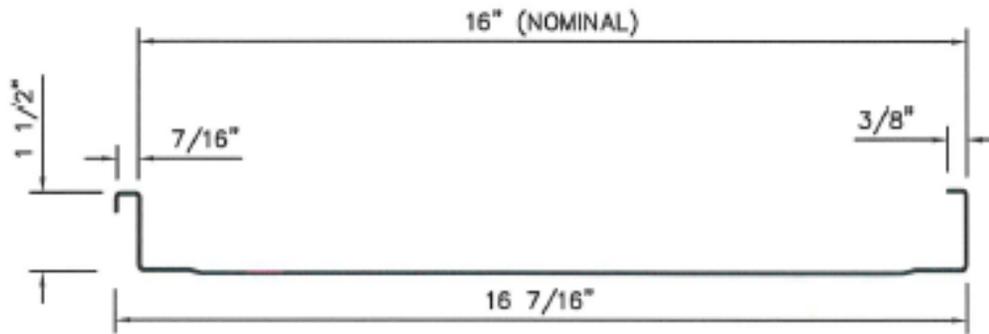

PANEL PROFILE

Installation method:

	System #1	System #2
Max Design Pressure	-86 psf	-168.5 psf
Clip spacing	16" o.c.	12" o.c.
Seam	90deg	180deg

ONYX METALS 1 1/2" STANDING SEAM ROOF PANEL,
24 Ga. STEEL, 16" WIDE, OVER 5/8" PLYWOOD.

